

EMC32 Report

Common Information

Test Description: EMC32 Standard Report Setup
Operating Conditions: Normal
Operator Name: Jožef Papler

EMI Auto Test Template: GTEM Cell


Hardware Setup: TEM Cell
Measurement Type: GTEM
Frequency Range: 30 MHz - 1 GHz
Graphics Level Range: 0 dB μ V - 50 dB μ V


Preview Measurements:
Cell Factor C1: C1 GTEM Cell
OATS Factor C2: C2 OATS 10 m
Scan Test Template: TEM Cell pre

Final Measurements:
Template for Single Meas.: TEM Cell fin podaljsan

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 1 GHz	30 kHz	QPK	120 kHz	1 s	20 dB
Receiver:	[ESU 8]				

GTEM.wmf

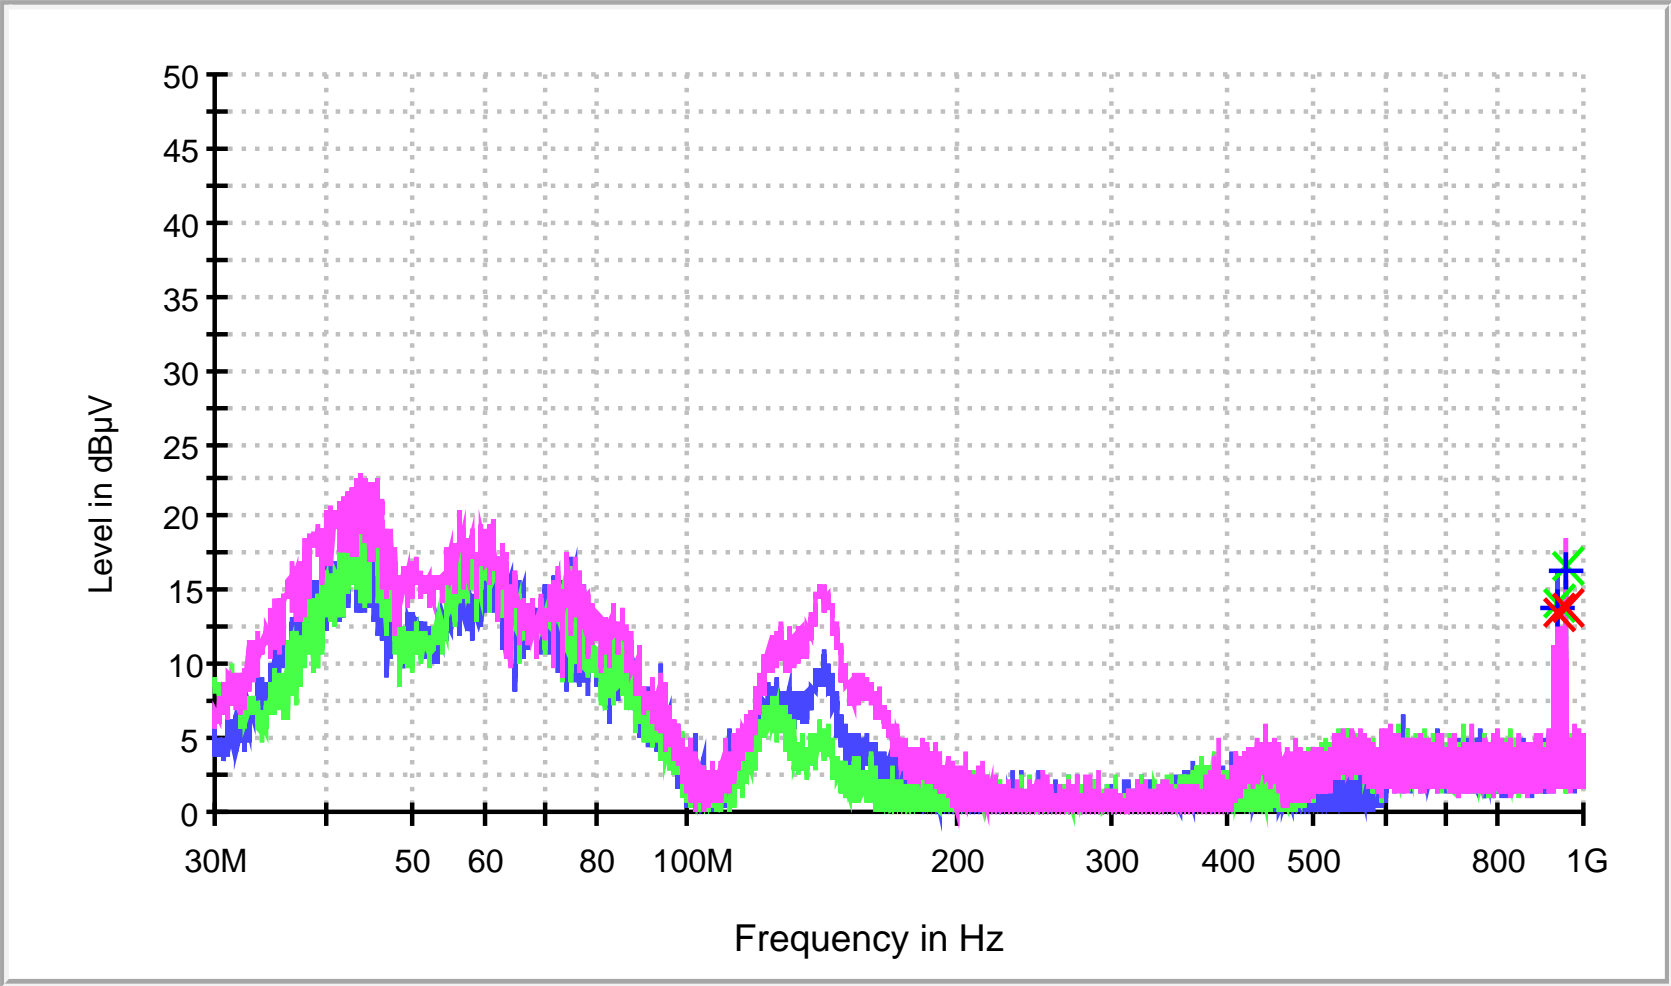

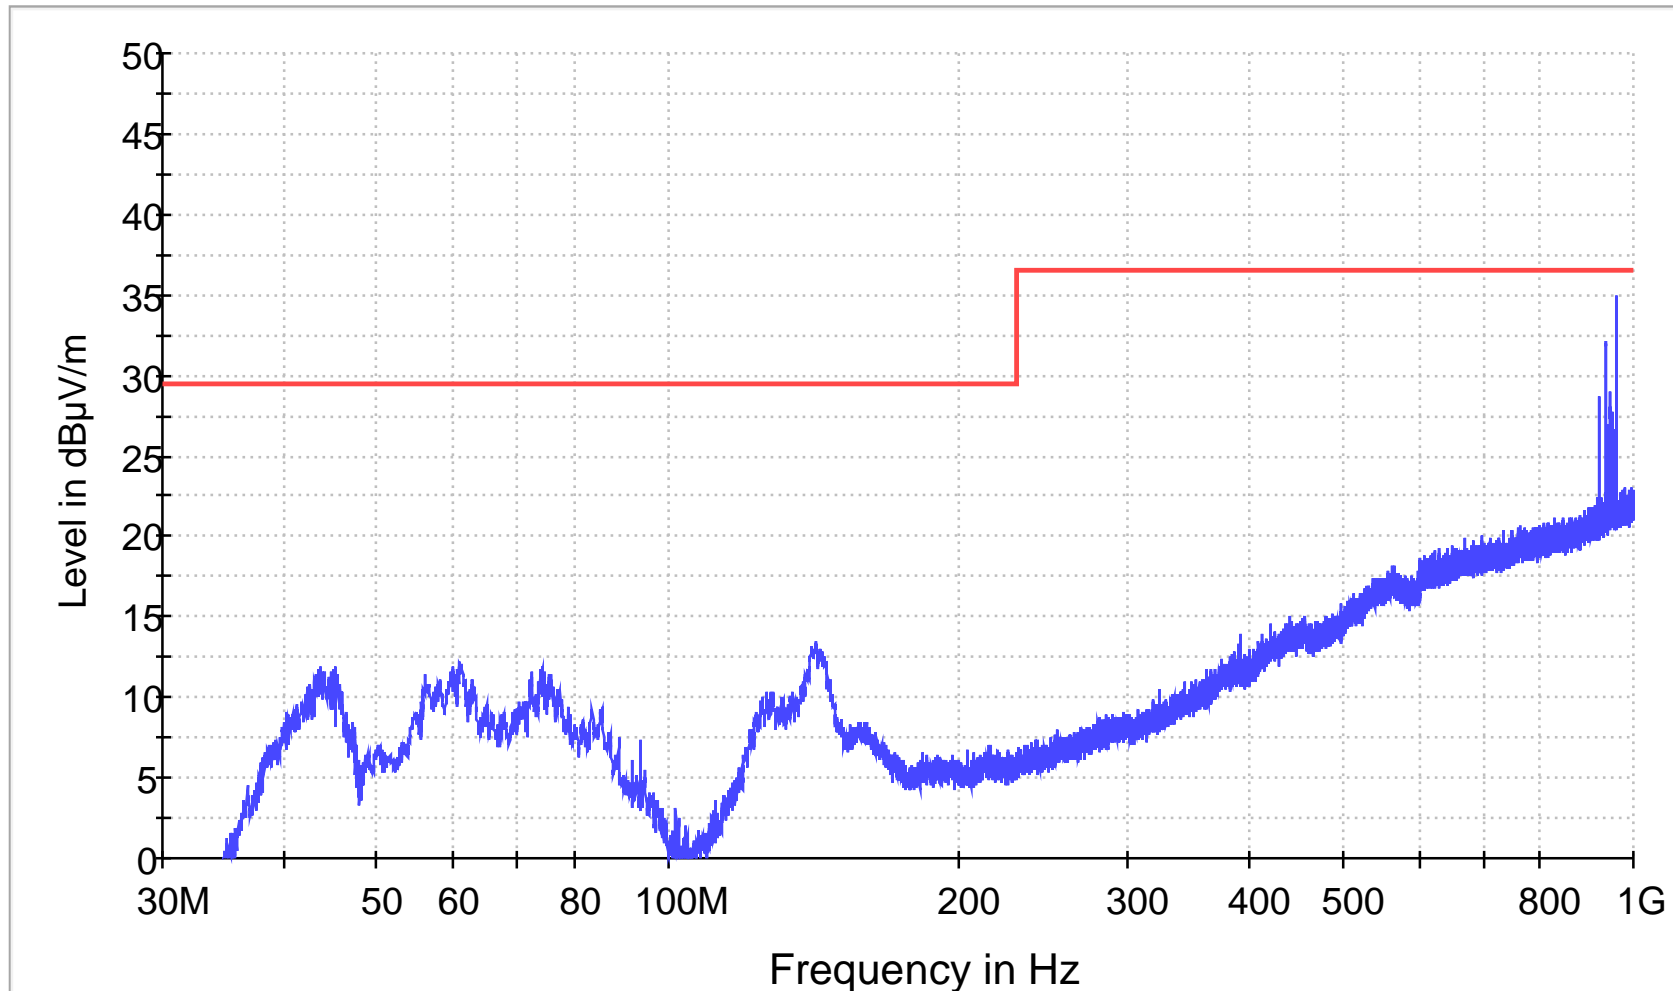OATS Spectrum.wmf

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Corr . (dB)	Com ment
935.400000	31.90	36.50	4.60	1000.0	120.000	1.5	12:38 :37 - 16.8.2 017
959.220000	34.01	36.50	2.49	1000.0	120.000	1.5	12:38 :37 - 16.8.2 017